

# ACTUATOR 230 V




**EKWCVATR1V3**




<https://qr.daikin.eu?N=EKWCVATR1V3>



## ASSEMBLY

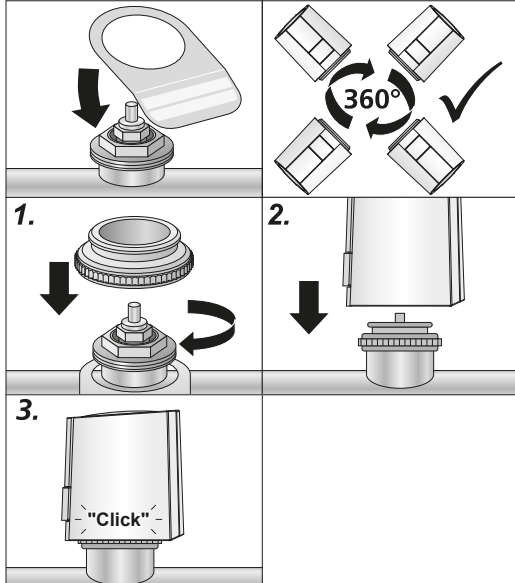

## DISASSEMBLY




## CONNECTION

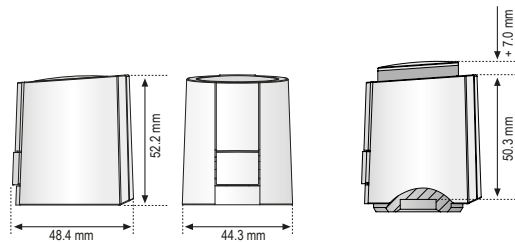

## First-Open

NC



### "First-Open" function

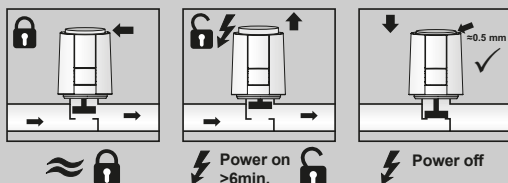



**NC**

Normally Closed

### Adaption check

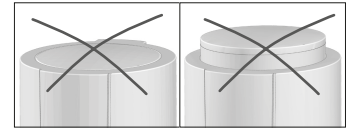

### Operation mode



### Technical Specifications:

Operating voltage:	230 V, +10 % ... -10 %, 50/60 Hz
Operating capacity:	1 W
Max. inrush current:	< 550 mA for max. 100 ms
Actuating force:	100 N +10 %
Type of protection:	IP 54
Ambient temperature:	0 °C ... 60 °C
Storage temperature:	-25 °C ... 60 °C
Stroke:	4.0 mm



This symbol means that electrical and electronic products may NOT be mixed with unsorted household waste. Units must be treated at a specialized treatment facility for reuse, recycling and recovery.

By ensuring this product is disposed of correctly, you will help to prevent potential negative consequences for the environment and human health.

For more information, contact your installer or local authority.

